

MS9000X

Mid-Rise Scissor lift





STRATUS
auto equipment[®]

WWW.STRATUSAUTOEQUIP.COM

512-640-9896
sales@stratusautoequip.com

TECHNICAL

- Lifting Capacity: 9,000 LBS
- Max Lifting Height: 39 3/8"
- Min Height: 4 3/4"
- Lifting Time: 30-40 S
- Lowering Time: 25-35 S
- Motor Power: 3 HP
- Motor Voltage: Optional 110 V or 220V
- Motor Voltage: 220 V (Recommend 20A Breaker)
- Rated Frequency: 60 HZ
- Phase: 1 PH
- Platform Plate Thickness of Steel: 1/4"(6MM)
- Scissor Arms Thickness of Steel: 13/16"(20MM)
- Hydraulic Oil (Recommend AW46 or AW32): 1.6 GAL (6L)

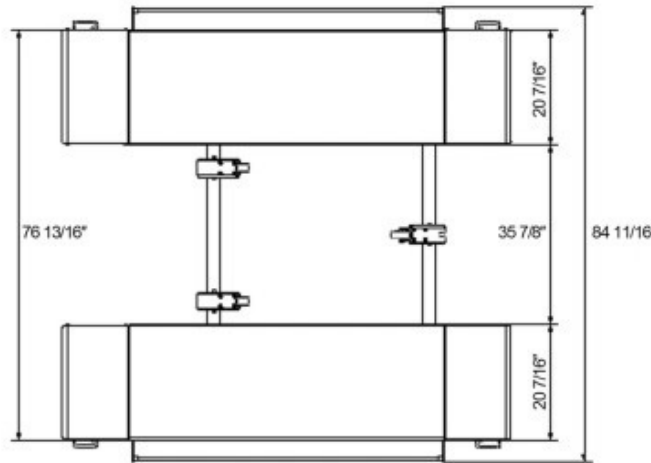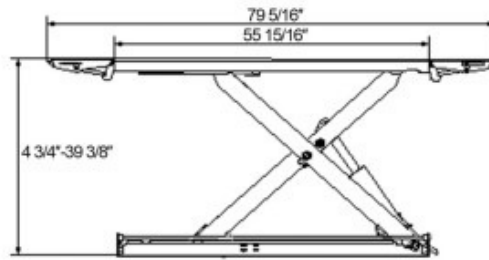

Warranty

5 YEAR LIFTING STRUCTURE

3 YEAR HYDRAULIC

2 YEAR ELECTRIC



FEATURES

- Available in 110V or 220V control unit
- Including 9 lock positions
- Available in 110V Control Unit (Recommend 30A breaker) & 220V Control Unit (Recommend 20A breaker)
- Optional 4" platform extension
- Optional support bar
- Optional set of 4 approach ramp kit for low profile vehicles
- 8 pcs rubber pads included, 4 of each 1 3/8" & 2 3/8"
- Pry Bar Tool included
- Dual cylinder structure with anti-surge valves
- Aluminum power unit with built-in 24V low voltage control system
- Self-lubricated bushing and bearing
- CE tested and approved by TUV
- Proofed by dynamic test with 120% of rated capacity and static test with 150% rated capacity
- Powder coating finish: Granite Gray (RAL 7026) + Reinorange (RAL 2004)