

UT12000

Full-Rise Scissor lift




STRATUS
auto equipment[®]

WWW.STRATUSAUTOEQUIP.COM

512-640-9896
sales@stratusautoequip.com

TECHNICAL

- Lifting Capacity: 12,000 LBS
- Max Lifting Height: 74 13/16" (1900mm)
- Min Height: 5 1/2" (140mm)
- Lifting Time: Less than 90 S
- Lowering Time: 30-60 S
- Motor Power: 4 HP
- Motor Voltage: 220 V
- Rated Frequency: 60 HZ
- Phase: 1 PH
- Hydraulic Oil (Recommend AW46/AW32): 4 GAL (15L)
- Platform Plate Thickness of Steel: 1/16" (8MM)
- Scissor Arms Thickness of Steel: 1 3/16"(30MM)

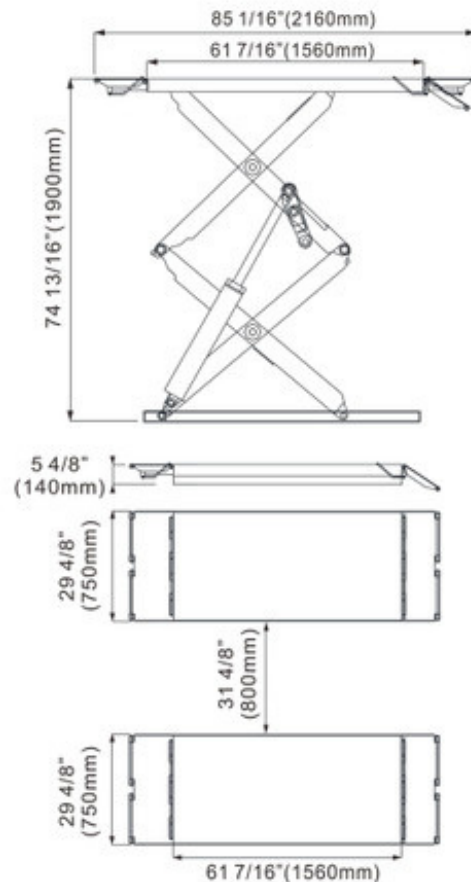

Warranty

5 YEAR LIFTING STRUCTURE

3 YEAR HYDRAULIC

2 YEAR ELECTRIC



FEATURES

- Commercial grade open center full rise low profile scissor lift
- On-Ground surface mount or In-ground flush mount (2 in 1 design (see detailed foundation plan)
- Pneumatic safety lock release
- Durable cylinders with anti-surge valves
- Overload protection
- Alloy solid steel X structure, good rust resistance and not easy to deformation
- Ramp can be used as platform extension suitable for different length of chassis
- Wear-resisting bearings
- 10 lock position, each lock position is 2" (50mm) apart
- 8 pcs rubber pads included, 4 of each 1 1/2" & 4"
- Low profile design, minimum height is only 4 5/16"
- Self-lubricated bushing and bearing
- Proofed by dynamic test with 115% of rated capacity and static test with 150% rated capacity