

UT9000

Full-Rise Scissor lift




STRATUS
auto equipment[®]

WWW.STRATUSAUTOEQUIP.COM

512-640-9896
sales@stratusautoequip.com

TECHNICAL

- Lifting Capacity: 9,000 LBS
- Max Lifting Height: 77 9/16"
- Min Height: 5"
- Lifting Time: Less than 60 S
- Lowering Time: 30-60 S
- Motor Power: 4 HP
- Motor Voltage: 220 V
- Rated Frequency: 60 HZ
- Phase: 1 PH
- Hydraulic Oil (Recommend AW46/AW32): 4 GAL (15L)
- Platform Plate Thickness of Steel: 1/4" (6MM)
- Scissor Arms Thickness of Steel: 1 1/8"(28MM)

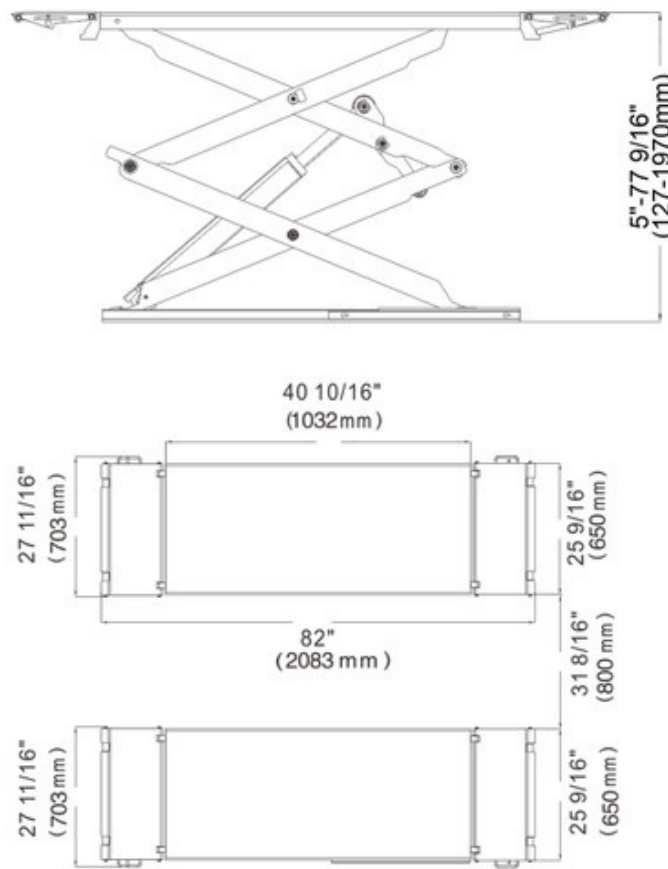

Warranty

5 YEAR LIFTING STRUCTURE

3 YEAR HYDRAULIC

2 YEAR ELECTRIC



FEATURES

- Commercial grade open center full rise low profile scissor lift
- On-Ground surface mount or In-ground flush mount (2 in 1 design (see detailed foundation plan)
- Pneumatic safety lock release
- Durable cylinders with anti-surge valves
- Aluminum motor power unit
- 14 lock position
- 8 pcs rubber pads included, 4 of each 1 3/8" & 2 3/8"
- Low profile design, minimum height is only 4 5/16"
- 24V low voltage control system
- Platforms can be extended for long vehicles
- Self-lubricated bushing and bearing
- Proofed by dynamic test with 120% of rated capacity and static test with 150% rated capacity
- Powder coating finish: Granite Gray (RAL 7026) + Reinorange (RAL 2004)